

TECHNICAL DATA

Product type	Reverse osmosis watermaker
Application	Portable seawater for nautical application
Production	30 Lit/h (7,8 Gal/h) @35ppm e 25°C
Membrane	1x Membrane SW-2521
Rejection	99,5% (nominal)
Power supply	12V±15% DC 24V±15% DC
Absorption - Power required	9A - 110W (12V) 4,5A - 110W (24V)
Pump	Shurflo diaphragm pump
Pressure pump	7 - 8 bar
Flow rate pump	4,5 - 5 l/min
Water inlet temperature range	8 - 30 °C
Pre-filtration	1x 5micron filter 5"x2-1/2"
Shipping wight	44 kg
Shipping dimensions	82x60x64 cm



HYDRAULIC CONNECTIONES


WATERMAKER

Seawater inlet	Quick coupling
Concentrated water outlet	Quick coupling
Fresh water outlet	Quick coupling

CONTROL SYSTEMS AND OPTIONAL DEVICES

Electronics	N.A.
Automatic flushing	N.A.
Safety control	High pressure
Salinity monitoring	N.A.

WEIGHT AND DIMENSIONS

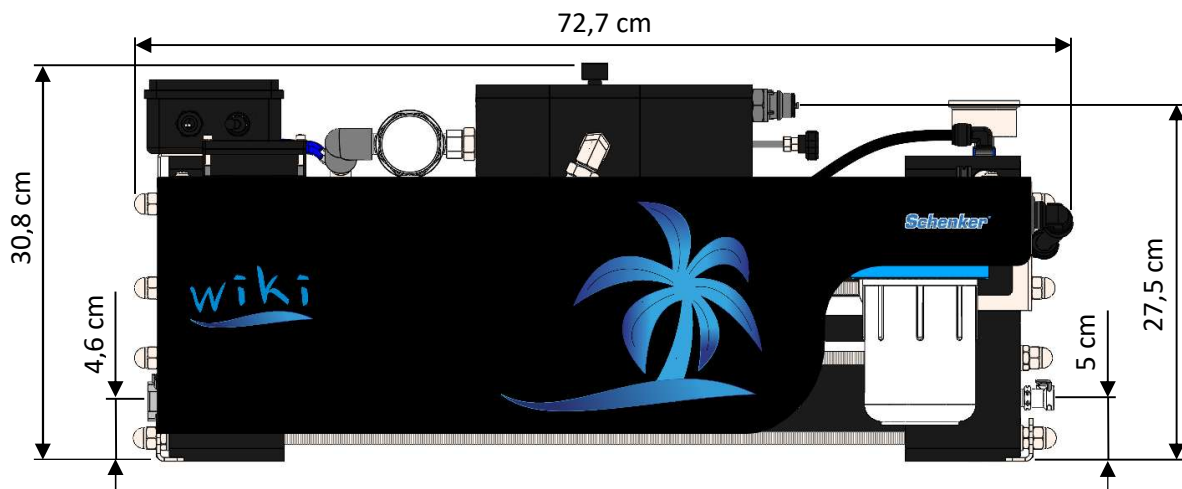

WATERMAKER
Depth: 25,8 cm - Weight: 26 kg

ACCESSORIES



SCHENKER ITALIA s.r.l.

Via Ferrante Imperato, 499/501, Condominio Genesis

80146 NAPOLI – NA – Italia

email: info@schenker.it

web: <https://schenkerwatermakers.com/>

tel. +39 0815593505 - 0815590931